

Multi-spectral Imaging



Red Edge 2: 750nm @15nm

Red: 660nm @20nm


Blue: 450nm @35nm

Green: 555nm @25nm

Red Edge 1: 720nm @10nm

NIR: 840nm @35nm

Sensor Model	Ms600
Dimension	79x74x52 mm (LxWxH)
Weight	275 g (DLS module excluded)
Power Consumption	7W nominal; 10W peak (DLS module included)
Sensor Feature	sync radiometric calibration; realtime reflectance computation
Sensor Specification	global shutter; resolution 1.2 MP; 12-bit ADC; 6 channels
Sensor Size	CMOS 1/3"; F/2.2; E 5.2mm; pixel 3.75um; FOV 49.6° x 38°
Spectral Sensitivity	300-1000 nm; 17 bands; PT ≥95% @OD2
Optical Window	sapphire glass, wear & scratch resistant
Ground Resolution	8.65cm @120m AGL
Frame Coverage	110x83m @120m AGL
Image Format	16-bit Tiff & 8-bit JPEG
Capture Rate	max. 1 m/s (all channels)
Record Rate	≥30 MB/s (Micro SD card, UHS-I Speed Class 3)
Data Storage	default 64 GB, max. 128 GB
Operating Temperature	-10°C ~ +50°C (relative wind speed ≥1 m/s)
Relative Humidity	≤85%, non-condensing

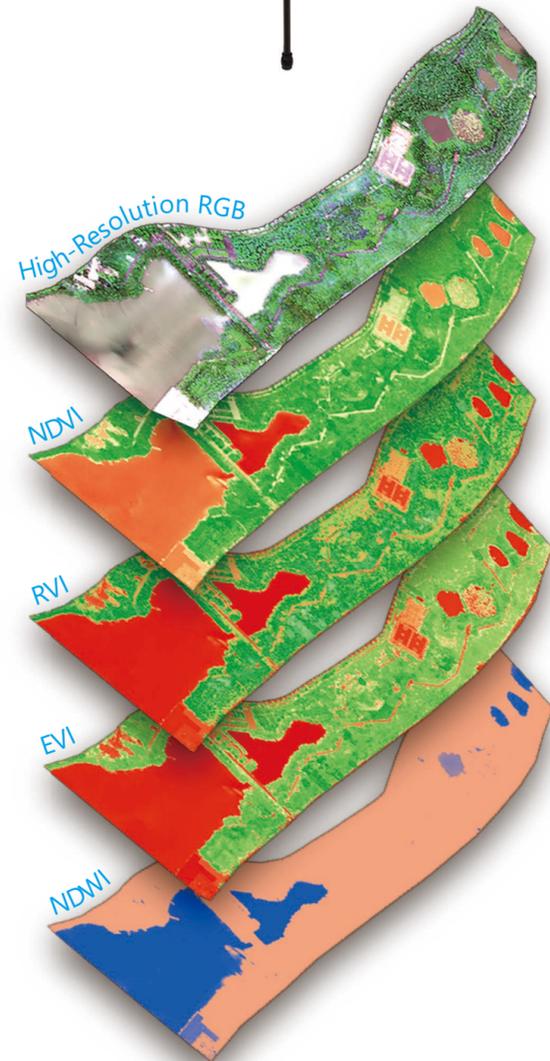

SPECIFICATION

Aircraft	Drone-eco Pro	Drone-eco	Drone-eco Plus
Model	Drone-eco Pro	Drone-eco	Drone-eco Plus
Type	quadcopter, X-shape body, with foldable propellers	quadcopter, H-shape body, with quick release propellers	quadcopter, H-shape body, with quick release propellers
Control Method		vertical take-off & landing	
Structure	fully integrated, assembly free	quick assembly	quick assembly
Diagonal Distance	716 mm	618 mm	618 mm
Dimension	564 x 564 x 360 mm (L x W x H)	450 x 424.3 x 290 mm (L x W x H)	450 x 424.3 x 290 mm (L x W x H)
Weight	5.15 kg (with battery); 2.35 kg (without battery)	3.2kg (with battery); 1.7 kg (without battery)	3.2kg (with battery); 1.7 kg (without battery)
Payload Capacity	max. 1.4 kg	max. 0.8 kg	max. 1.2 kg
Max. Take-off Weight	6.55 kg	4.0 kg	4.5 kg
Power Supply		Lithium polymer battery, one unit	
Battery Power	25,000 mAh, 6S, 26.1V	12,000 mAh, 6S, 26.1V	13,700 mAh, 6S, 23.1V
Battery Charging Time	approx. 1.5 h (@ 15 A)	approx. 1.2 h (@ 10 A)	approx. 1.3 h (@ 10 A)
Obstacle Sensing		forward 2-40 m, millimeter-wave radar detection	
Downward Laser Ranging		10 m, for precise landing control	
Max. Service Ceiling		4000 m ASL	
Working Height		typical 60-1000 m	
Cruising Speed		max. 12 m/s	
Endurance	approx. 80/70/60 min*	(without payload/with single lens/with 5-lens) approx. 60/50/- min*	approx. 70/60/50 min*
Effective Flight Duration	approx. 60/55/50 min*	(without payload/with single lens/with 5-lens) approx. 55/50/- min*	approx. 60/50/40 min*
Response Time		setup < 3 min; packing < 3 min	
Weather Limit	beaufort scale 6	beaufort scale 5	beaufort scale 5
Operating Temperature		-20°C ~ 50°C	
Environmental Humidity		90% condensing	
Ingress Protection Rating		IP 45	
Positioning System		dual redundancy design	
Airborne GNSS Module		GPS + Glonass + Galileo + Beidou tracking	
Differential Mode	GNSS PPK	GNSS PPK	GNSS PPK/RTK
Data Refresh Rate		RTK: 100 Hz; PPK: 5/10/20 Hz optional	
Hovering Accuracy		H: 1cm+1ppm; V: 2cm+1ppm	
Positioning Accuracy		when fixed: H: 1cm+1ppm; V: 1.5cm+1ppm	
Relative Accuracy (XY/Z)		1-3x GSD / 1-5x GSD	
Single Flight Range	40-50 km (@ 12 m/s, with single lens)	30-36 km (@ 12 m/s, with single lens)	40-45 km (@ 12 m/s, with single lens)
Single Flight Coverage	max. 3 sq.km (@ 10 cm GSD, with S42)	max. 2.2 sq.km (@ 10 cm GSD, with S42)	max. 2.6 sq.km (@ 10 cm GSD, with S42)
POS Data Storage		Micro SD card, 16 GB	
Download Interface		Micro USB	
Pilot Interaction		LED indicators & Web UI	
Video Transmission	N/A	N/A	picture-in-picture realtime display, FPV or downward optional
Remote Controller			
Datalink Mode		WiFi + type C + RD-link	
Internet Access		via external SIM card	
Control Frequency		2.4 - 2.483 GHz	
Communication Channel		≥12	
Radio Datalink Range		5 km	
Transmitting Power		20 dBm @CE / 23 dBm @FCC	
Display Terminal		integrated with LED display, 7-inch, Android OS	
Working Time		6 - 20 h	
Hardware Option		upgradeable upon request	
Payload			
Connectivity		typical flange connector	
Power Supply		external, supplied by drone battery	
Trigger Exposure		flight control system triggering	
Time Synchronization		POS recorded while triggering	
Device Options		single lens, multi-lens, etc.	
Payload Option ①		S24, customized single lens, 24.3 MP, 25 mm lens, 266 g	
Payload Option ②		S42, customized single lens, 42.4 MP, 40 mm, full framer, 336 g	
Payload Option ③		T53P, customized 5-lens (45° lateral lens x 4, 35 mm; center lens, 25 mm), 120 MP in total, 750 g	
Payload Option ④		Q51, customized 5-lens (45° lateral lens x 4, 56 mm; center lens, 40 mm), 210 MP in total, 1.2k g	

Note*: such flight duration descriptions were obtained in an environment of 20°C with no wind and 95%+ new battery. The result might vary under different actual conditions.

AERIAL EFFICIENCY

imaging sensor	single flight coverage (flight height & ground resolution)				
S24 (24 MP)	113 ha (@96m, 1.5cm GSD)	206 ha (@191m, 3cm GSD)	250 ha (@319m, 5cm GSD)	500 ha (@638m, 10cm GSD)	
S42 (42 MP)	140 ha (@133m, 1.5cm GSD)	263 ha (@266m, 3cm GSD)	350 ha (@444m, 5cm GSD)	600 ha (@888m, 10cm GSD)	
T53P (120 MP)	50 ha (@96m, 1.5cm GSD)	93 ha (@191m, 3cm GSD)	126 ha (@319m, 5cm GSD)	250 ha (@638m, 10cm GSD)	
Q51 (210MP)	41 ha (@126m, 1.5cm GSD)	80 ha (@253m, 3cm GSD)	116 ha (@421m, 5cm GSD)	185 ha (@843m, 10cm GSD)	

Note: the reference data shown above is computed according to the forward overlap 75%/80% (single lens/5-lens) and side overlap 60%/70% (single lens/5-lens) from approx. 45-50 min. effective flight for a survey zone with aspect ratio around 2:1 and at cruising speed of 12 m/s.

SOUTH SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.
 Add: South Geo-Information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China
 Tel: +86-20-23380888 Fax: +86-20-23380800
 E-mail: mail@southsurvey.com export@southsurvey.com
 http://www.southinstrument.com

dealer info

SOUTH
Target your success

FLY2MAP SERIES

Drzne-eco/Drzne-eco Plus/Drzne-eco Pro



Hey! Take It Easy coz' Fly It Easy!



"Impressive is the ground control station software running on the integrated remote controller display. The survey-oriented flight plans and attentive safety control are tailor-made for drone pilots engaging in professional survey work. The well-balanced representation of aerial efficiency, mapping accuracy plus ease-of-use makes it a trustworthy UAV solution, yet it's fairly cost friendly. Believe it or not, you will find it much easier to train drone pilots than ever!" said Engr. Mayuan, a Chinese specialist dedicated to survey equipment R&D for nearly 30 years.

SKYSOLUTIONS



(V. 2022AUG)



▶▶▶ Drone (aerial zone)

- highly integrated aircraft, **assembly free** and ready to use after unpacking
- fully autonomous operation after proper settings, **no pilot control required**
- direct geo-referencing** with accurate POS data delivered by airborne GNSS
- millimeter-wave radar that provides **intelligent obstacle avoidance** against flight safety
- a lightweight but efficient unit that enjoys **much longer endurance**
- a **variety of payload** options available for diverse needs
- optimized precise landing** controlled by downward laser ranging


▶▶▶ Fly2Map Pilot (ground station software)

- display interface integrated with remote controller, **no tablet or laptop required** for ground control
- survey-oriented flight plans** specifically made for professional aerial mapping
- compulsory pre-flight **checklist that guarantees no improper use**
- one-key return-to-home** command in case of emergency
- auto return-to-home** function enabled by challenging conditions
- terrain-following option** ready for rugged terrains
- possible to **start with last waypoint to continue** the mission
- progress bar that vividly **illustrates flight duration and battery percentage**




▶▶▶ Fly2Map Manager & Fly2Map Cloud (process & control software)

Fly2Map Manager

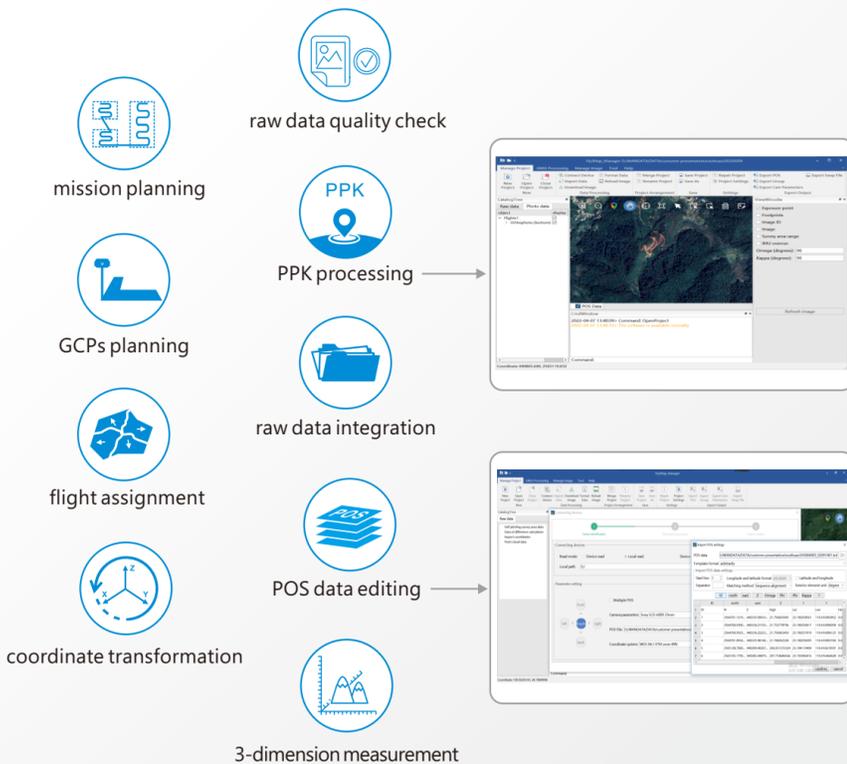

Fly2Map Cloud

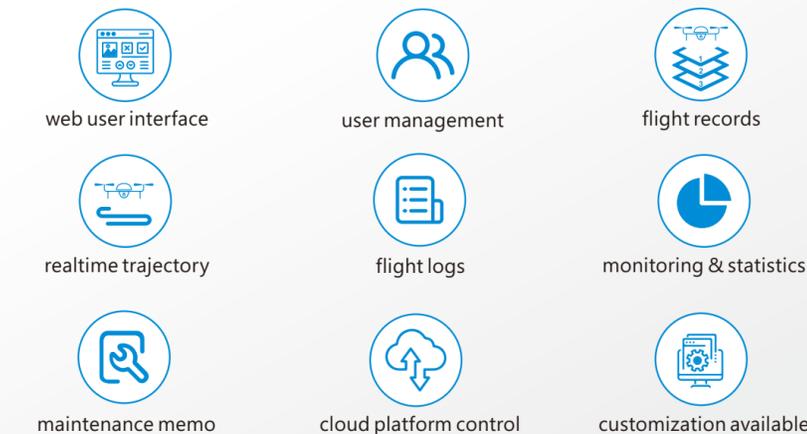

▶▶▶ 2D Photogrammetry



▶▶▶ 3D Photogrammetry

